




DRACO ▶ DORADO

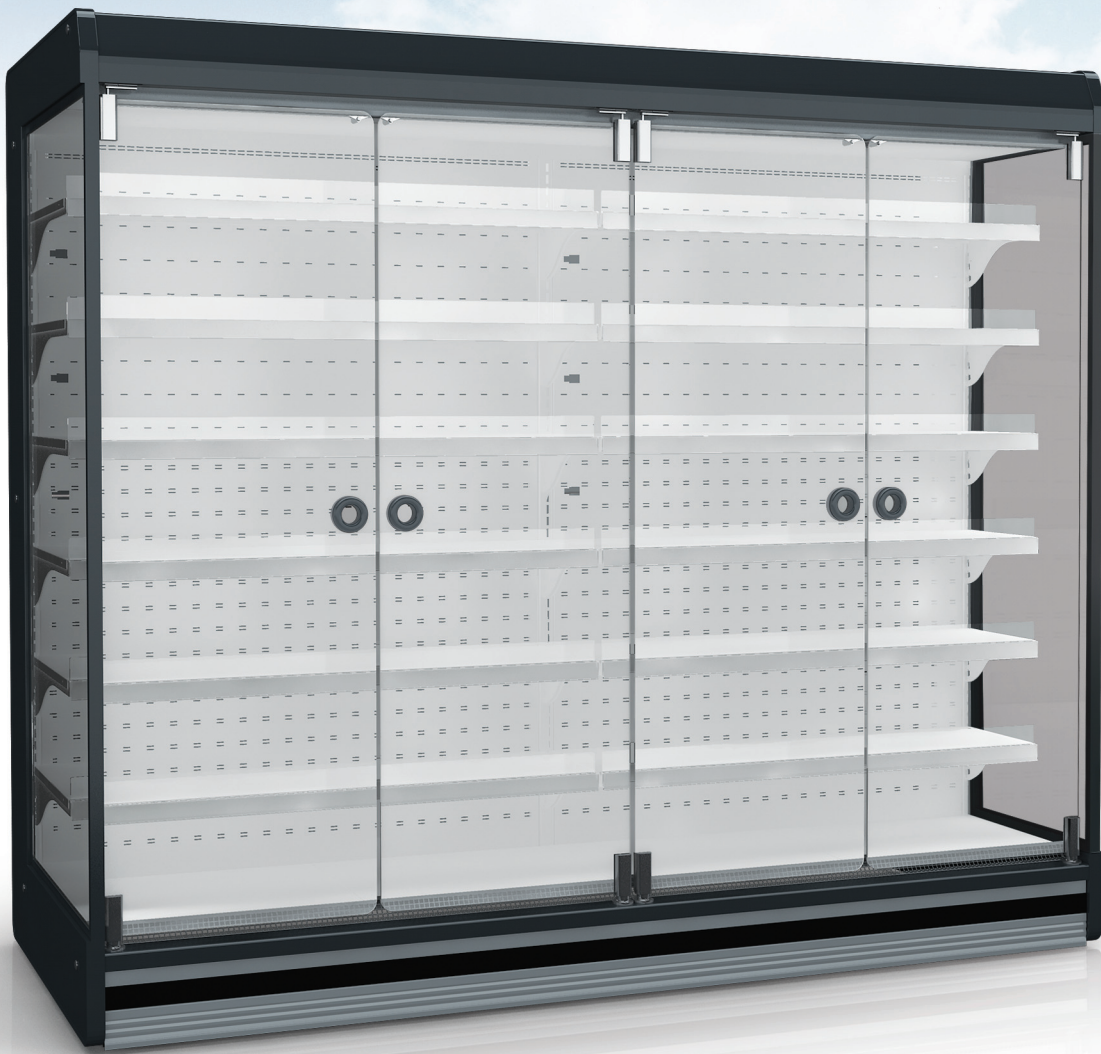

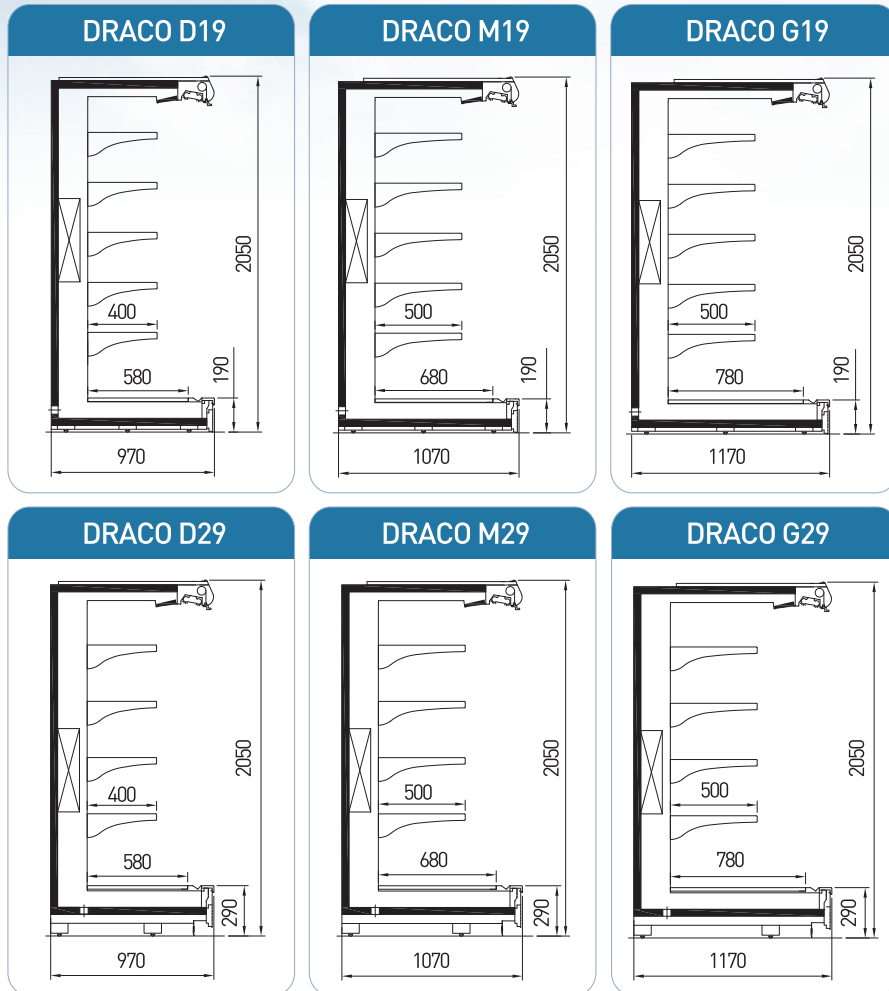

DRACO	Temperature	Length (mm)						
		1250	1875	2500	3750	2000 Head	2300 Head	2600 Head
D19 / D29 SL	M2 (-1 / +7°C)	◆	◆	◆	◆	◆	◆	◆
M19 / M29 SL	M2 (-1 / +7°C)	◆	◆	◆	◆		◆	◆
G19 / G29 SL	M2 (-1 / +7°C)	◆	◆	◆	◆			◆
D19 / D29 PE	M0 (-1 / +4°C); M1 (-1 / +5°C)	◆	◆	◆	◆	◆	◆	◆
M19 / M29 PE	M0 (-1 / +4°C); M1 (-1 / +5°C)	◆	◆	◆	◆		◆	◆
G19 / G29 PE	M0 (-1 / +4°C); M1 (-1 / +5°C)	◆	◆	◆	◆			◆
D19 / D29 SM	H1 (+1 / +10°C)	◆	◆	◆	◆	◆	◆	◆
M19 / M29 SM	H1 (+1 / +10°C)	◆	◆	◆	◆		◆	◆
G19 / G29 SM	H1 (+1 / +10°C)	◆	◆	◆	◆			◆
LIFT	M2 (-1 / +7°C)	◆	◆	◆	◆			◆
Side wall thickness (mm)		40						

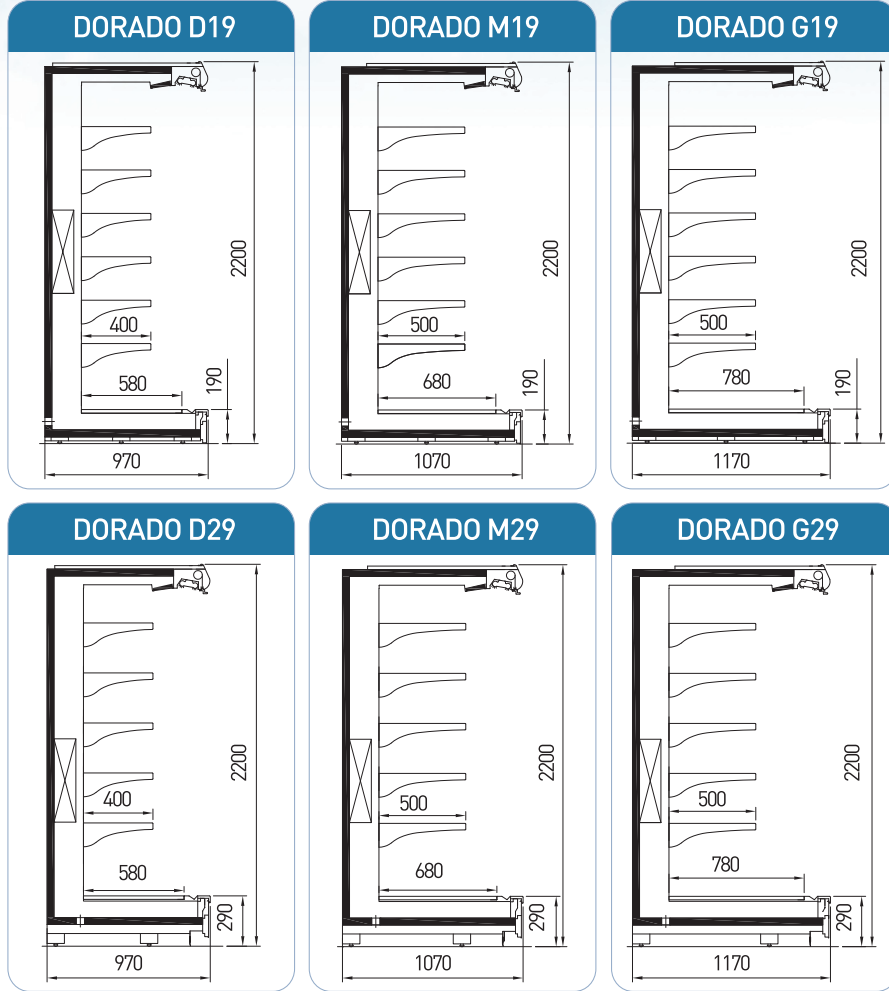

DORADO	Temperature	Length (mm)						
		1250	1875	2500	3750	2000 Head	2300 Head	2600 Head
D19 / D29 SL	M2 (-1 / +7°C)	◆	◆	◆	◆	◆	◆	◆
M19 / M29 SL	M2 (-1 / +7°C)	◆	◆	◆	◆		◆	◆
G19 / G29 SL	M2 (-1 / +7°C)	◆	◆	◆	◆			◆
D19 / D29 PE	M0 (-1 / +4°C); M1 (-1 / +5°C)	◆	◆	◆	◆	◆	◆	◆
M19 / M29 PE	M0 (-1 / +4°C); M1 (-1 / +5°C)	◆	◆	◆	◆		◆	◆
G19 / G29 PE	M0 (-1 / +4°C); M1 (-1 / +5°C)	◆	◆	◆	◆			◆
D19 / D29 SM	H1 (+1 / +10°C)	◆	◆	◆	◆	◆	◆	◆
M19 / M29 SM	H1 (+1 / +10°C)	◆	◆	◆	◆		◆	◆
G19 / G29 SM	H1 (+1 / +10°C)	◆	◆	◆	◆			◆
LIFT	M2 (-1 / +7°C)	◆	◆	◆	◆			◆
Side wall thickness (mm)		40						

- TEKSO teknik özellikler ve aksesuarları değiştirme hakkını saklı tutar.
- TEKSO reserves the right to change any technical details or accessories without previous notice.

